



NC-60 STATIONARY COMPACTOR WITH RECEIVER

The small footprint you need, the serious power you want.



Rock-solid waste equipment that outworks the competition

It's built to last because your business comes first.

- ✓ Quietest compactor on the market
- ✓ 5:1 compaction ratio—among the best available
- ✓ Highest quality UL and ETL listed components
- ✓ Most advanced electrical and hydraulic system
- ✓ Lowest-cost maintenance design
- ✓ Exceptional longevity
- ✓ 5-year industry-best warranty
- ✓ Market-leading service—before and after the sale

“

In every measurable aspect, we find that Nedland products exceed the specifications of others who make compactors. Their product is second to none.

—Steve Papai, President, Berkeley Shreds

Applications

Perfectly suited for high-rise apartment buildings, hotels, hospitals, nursing homes, and office buildings with dedicated waste chutes and trash rooms measuring at least 13' x 15'6".

Dig into the details

Compactor features

- Weatherproof control panel and power pack
- Removable rear access panel

Electrical/hydraulic features

- Controller power unit (PLC) with auto safety retract
- E-stop button
- Automatic single cycle
- Auto/manual selector
- Key lock on/off switch
- Low oil sensor shutdown
- Multi-cycle
- 80%–100% full lights
- 15' remote
- Automatic shutdown
- Fluid level and temp gauge
- Fluid-filled pressure gauge
- Inlet fluid strainer
- 15' hydraulic hoses
- Left or right-side hydraulic connections
- Biodegradable hydraulic fluid
- Submersible power unit

Receiver containers

Rear-load	Front-load
2-yard	2-yard
3-yard	3-yard
4-yard	4-yard
6-yard	6-yard
8-yard	8-yard



Specs

Overall length	5'
Overall width	3'4"
Overall height	3'11"
Compactor capacity	0.6 cu yds
Compactor floor	3/8" AR steel plate with 3" structural channels
Compactor sides	1/4" steel plate with 3" x 2" x 1/4" structural steel tubing
Ram face and bottom	3/8" AR steel plate
Platen area	2'6" x 2'6" x 2'5"
Charge opening	2'6" x 2'6"
Ram penetration	6"
Breaker bar	6" x 6" x 1/2" with retaining teeth
Twin bypass cylinders	3-1/2" x 2'6" x 1-1/2"
Hydraulic cylinder mounts	1/2" steel plate
Wear bars	Replaceable 1/2" UHMW polyethylene
Line pressure	2,000 PSI
Max line pressure	2,500 PSI
Max ram force	21,000 PSI
Cycle time	40 sec
Fluid capacity	35 gal
Pump	5 GPM
Motor	5 HP tri-volt, 3-phase
Loading height	3'5"
Approximate weight	3,100 lbs

Options

- 5 HP 220V, 1 phase
- Fluid reservoir heater
- Photo eye
- Safety beacon and horn
- Open hopper (for loading dock or ground loading)
- Enclosed doghouse with door and interlock
- Side-loading hoppers
- Through-the-wall chutes

Schematics

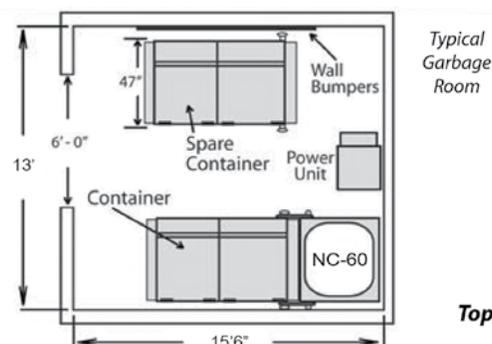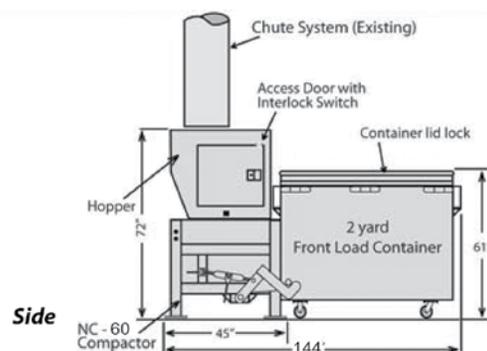

We refuse to cut corners

For 80+ years, our family-owned business has delivered exceptional quality, unparalleled service, and continuous innovation to the waste and recycling industry. Companies just like yours have counted on us—for decades.



Discover the Nedland difference

Give us a ring. There's nothing we love like talking trash (in a nice midwestern way).

+1-800-447-4925

nedland.com



Nedland Industries, Inc.

315 Railroad Street,
Ridgeland, WI 54763

This equipment conforms to all current ANSI Z 245.2 safety standards.

All sizes are approximate. Quality materials and product improvement are a continuous commitment at Nedland Industries. These specifications are subject to change without notice.